



Specifications

Frq. (GHz) Band (WR-)	18-26.5 K (42)	22-33 (34)	26.5-40 Ka (28)	33-50 Q (22)	40-60 U (19)	50-75 V (15)	60-90 E (12)	75-110 W (10)	90-140 F (8)	110-170 D (6)	140-220 G (5)
Attn. Range	3dB, 6dB, 10db, 15dB (or any special request / Attenuation between 3 - 15)										
VSWR	1.12	1.12	1.12	1.12	1.12	1.12	1.12	1.12	1.17	1.17	1.22
Attn. Range	20dB, 30dB, 40dB (or special request / Attenuation between 20 - 40)										
VSWR	1.43	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22
Max safe power handling (mW)	1000	1000	1000	750	750	500	500	500	300	300	300

QuinStar
Technology, Inc.

QuinStar
Technology, Inc.



Mechanical Specifications


FREQUENCY BAND	WAVEGUIDE SIZE	FLANGE PATTERN	OUTLINE DIMENSIONS, inches/mm
			FIXED ATTENUATOR
			L
K	WR-42	UG-595/U	3.0/76.2
Ka	WR-28	UG-599/U	2.75/69.9
Q	WR-22	UG-383/U	2.75/69.9
U	WR-19	UG-383/U	2.75/69.9
V	WR-15	UG-385/U	2.0/50.8
E	WR-12	UG-387/U	2.0/50.8
W	WR-10	UG-387/U	2.0/50.8
F	WR-8	UG-387/U	2.0/50.8
D	WR-6	UG-387/U	2.0/50.8
G	WR-5	UG-387/U	2.0/50.8

QuinStar
Technology, Inc.

QuinStar
Technology, Inc.



Plots

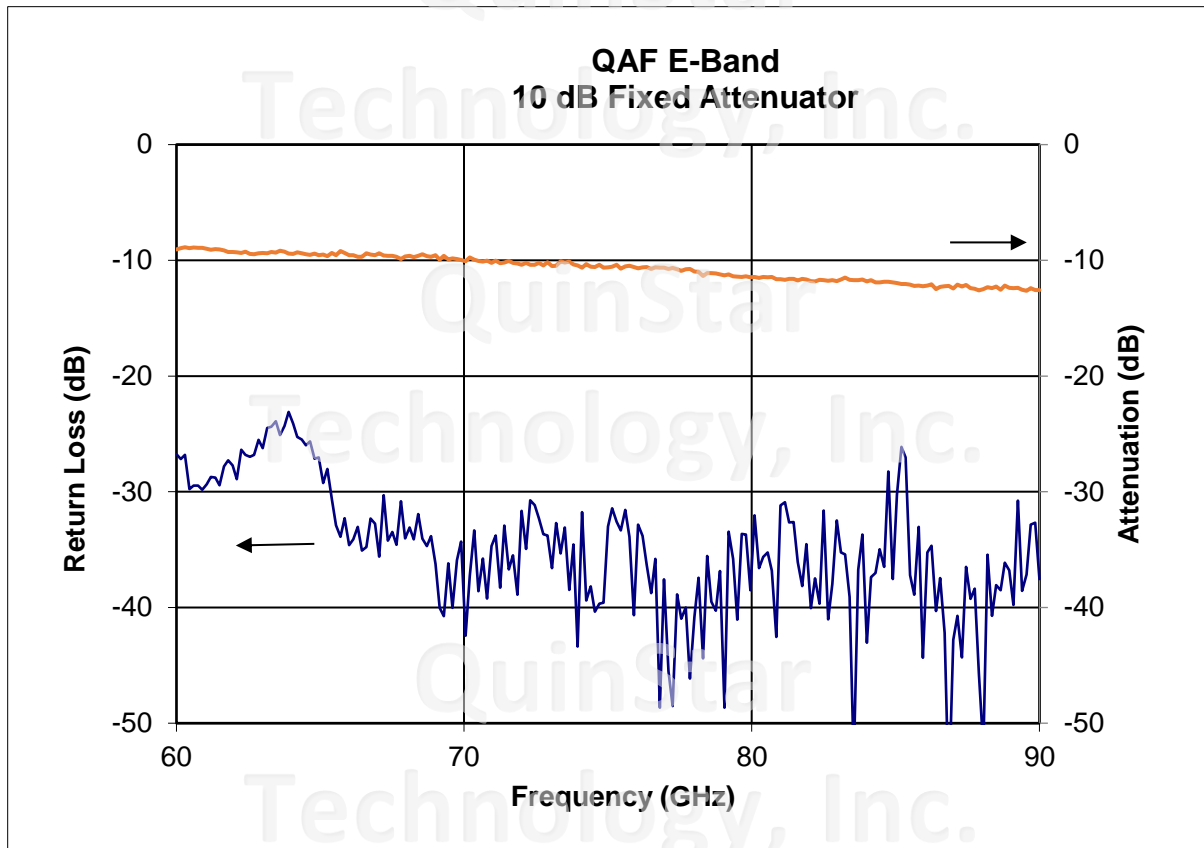

QuinStar
Technology, Inc.