



QCI-G0400801__

4 - 8 GHz Cryogenic Isolator

DESCRIPTION


QCI Cryogenic Isolators are field-displacement devices that offer exceptional broadband performance down to the mK range. The housing is made of OFHC copper and designed for optimal thermalization. We offer optional magnetic shielding. QCI products are available in array configurations to suit your applications. We design and manufacture our cryogenic isolators to meet your requirements.

FEATURES

- Exceptional Performance Down to the mK Range
- Low Insertion Loss
- Available with Standard, M μ -metal or Double Shielding

APPLICATIONS

- Quantum Computing
- Radio Astronomy
- Particle Physics Research

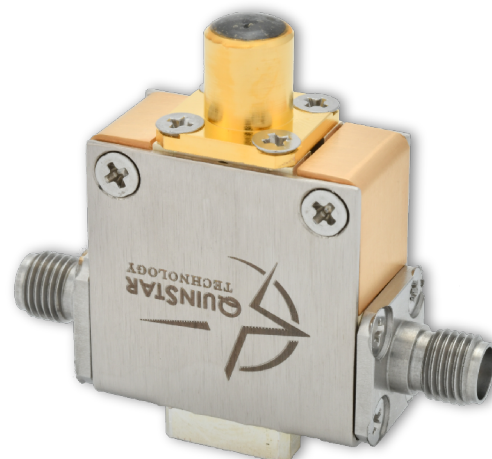

TECHNICAL SPECIFICATIONS: 4-8 GHz

PARAMETER	TYPICAL
Return Loss	24.0 dB
Insertion Loss	0.15 dB
Isolation	24.0 dB

Note: Double and higher junctions are also available.

MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATION
Connector	SMA Female/Male
Size	0.51" (W) x 1.75" (L) x 1.55" (H)
Housing Material	OFHC Copper
Weight	60g




MADE IN U.S.A.




QCI-G0400801__

4 - 8 GHz Cryogenic Isolator

RETURN LOSS VS. FREQUENCY

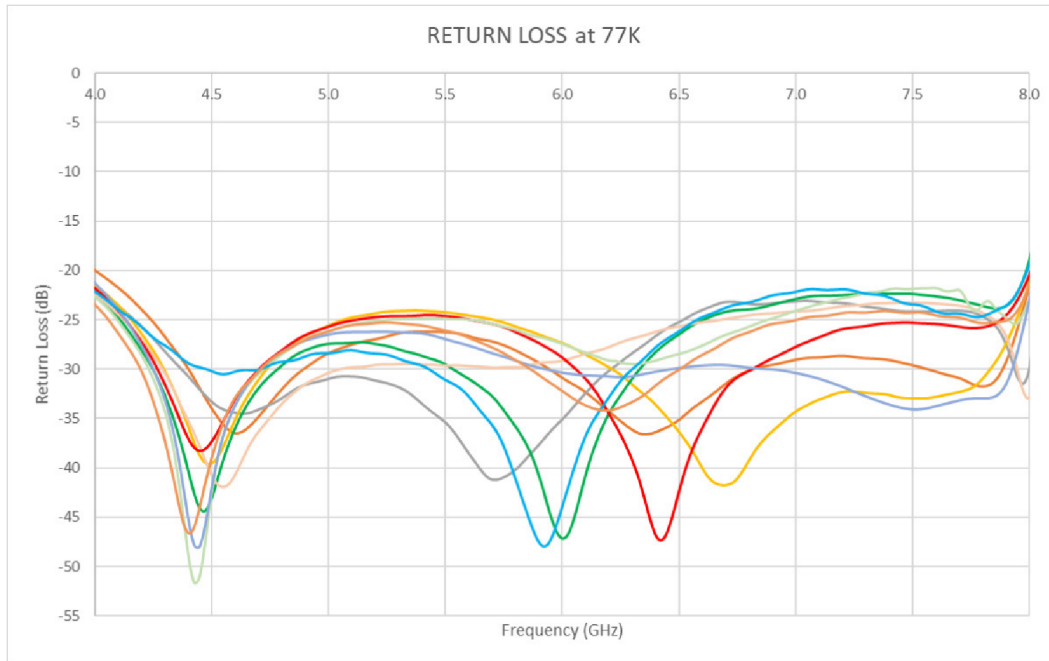

INSERTION LOSS VS. FREQUENCY

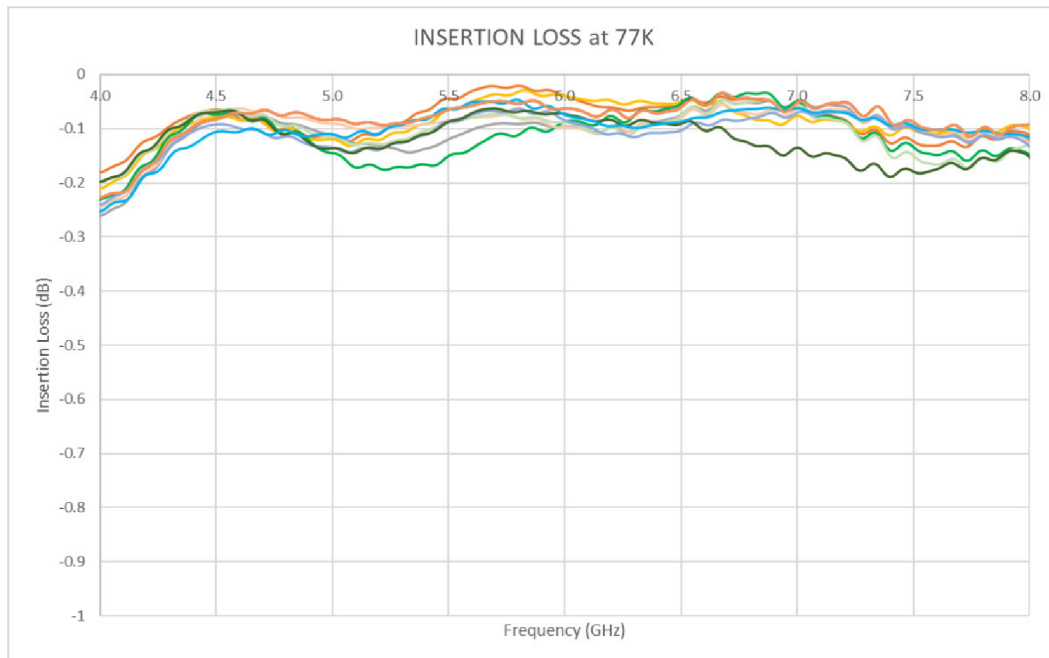


MADE IN U.S.A.



QCI-G0400801__

4 - 8 GHz Cryogenic Isolator

ISOLATION VS. FREQUENCY

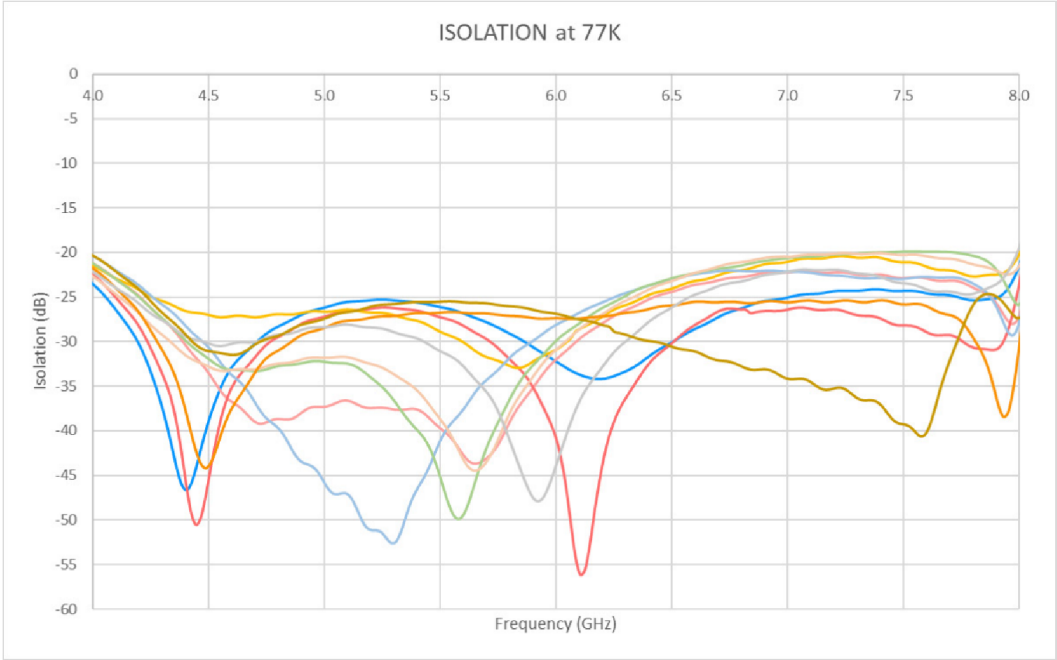

MADE IN U.S.A.




QCI-G0400801__

4 - 8 GHz Cryogenic Isolator


MECHANICAL OUTLINE (WITH STANDARD OR M μ -METAL SHIELDING)

Note: Dimensions in inches.

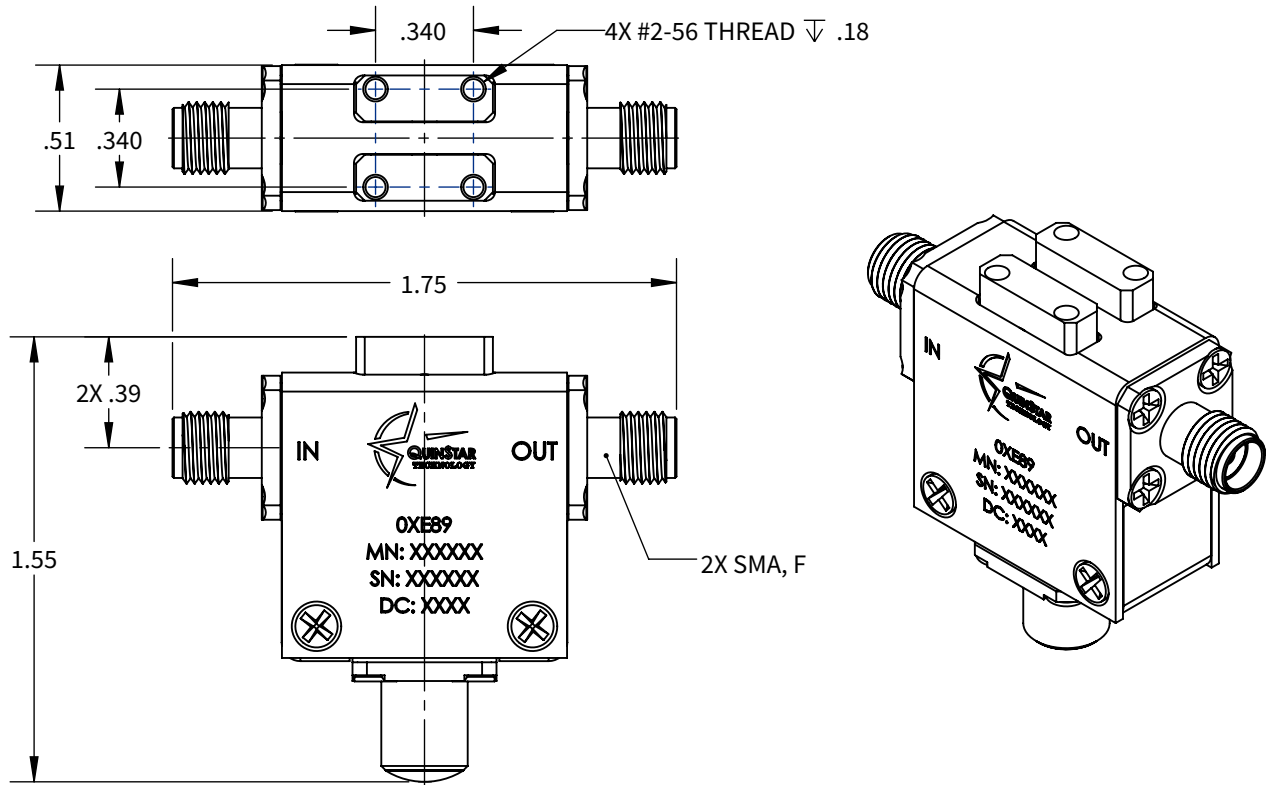

MECHANICAL OUTLINE (WITH DOUBLE SHIELDING)

Note: Dimensions in inches.

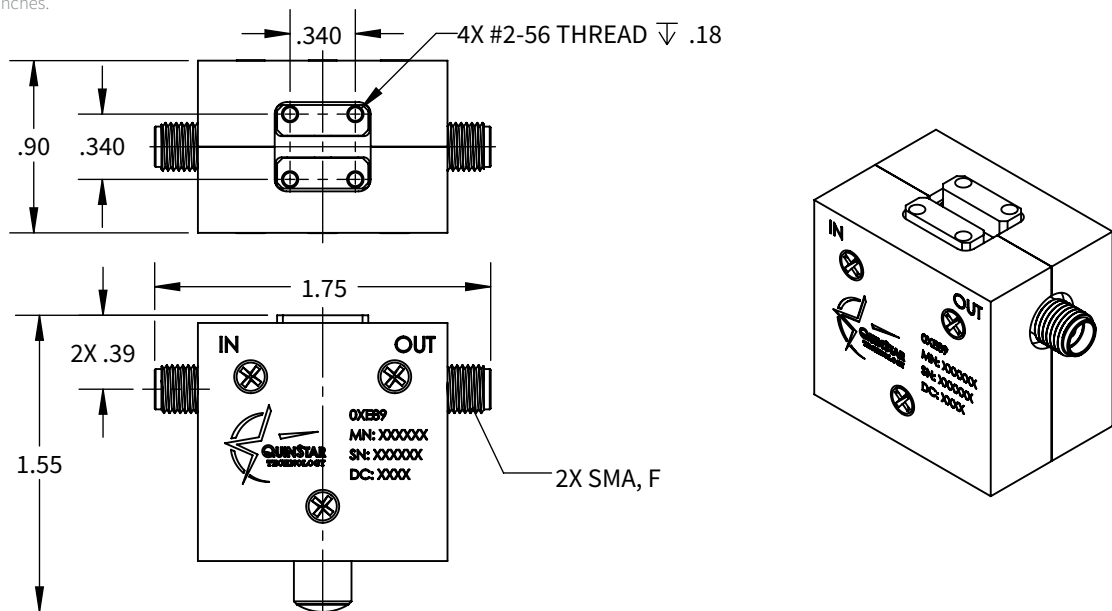

MADE IN U.S.A.